


Model CT221 – LV Plastic-Cased Current Transformers
Window 4.25", 600V, 10kV BIL

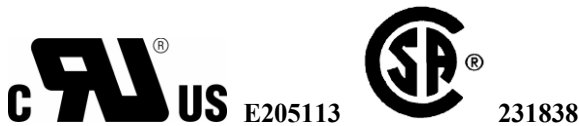

- UL, cUL Recognized and CSA Certified
- As per ANSI/IEEE C57.13, IEC, OR relevant standard

INSULATION LEVEL

600 V, BIL 10kV full wave

FREQUENCY

50-400 Hz

THERMAL RATING

200:5-2500:5 - 1.33 @ 30 deg. C ambient

3000:5-4000:5 - 1.00 @ 30 deg. C ambient

OUTER ENCAPSULATION

Plastic Cased

SECONDARY TERMINALS

Brass screw # 8-32 with one flat washer and lock washer

APPROX. WEIGHT

3 lbs.

CUSTOM OPTIONS (CONTACT US)

- Different Ratios
- IEC Ratios/Accuracies
- Non-standard thermal rating
- Different secondary termination
- Special mounting needs

TABLES

CATALOG NUMBER	CURRENT RATIO	ANSI METERING CLASS @ 60 HZ					THERMAL RATING FACTOR @30°C
		B0.1	B0.2	B0.5	B0.9	B1.8	
CT221-201	200:5	1.2	1.2	-	-	-	1.33
CT221-251	250:5	1.2	1.2	-	-	-	1.33
CT221-301	300:5	0.6	0.6	1.2	2.4	-	1.33
CT221-401	400:5	0.6	0.6	1.2	1.2	2.4	1.33
CT221-501	500:5	0.3	0.3	0.6	1.2	2.4	1.33
CT221-601	600:5	0.3	0.3	0.6	0.6	1.2	1.33
CT221-751	750:5	0.3	0.3	0.3	0.3	0.6	1.33
CT221-801	800:5	0.3	0.3	0.3	0.3	0.6	1.33
CT221-102	1000:5	0.3	0.3	0.3	0.3	0.6	1.33
CT221-122	1200:5	0.3	0.3	0.3	0.3	0.6	1.33
CT221-152	1500:5	0.3	0.3	0.3	0.3	0.6	1.33
CT221-162	1600:5	0.3	0.3	0.3	0.3	0.6	1.33
CT221-202	2000:5	0.3	0.3	0.3	0.3	0.3	1.33
CT221-252	2500:5	0.3	0.3	0.3	0.3	0.3	1.33
CT221-302	3000:5	0.3	0.3	0.3	0.3	0.3	1.0
CT221-352	3500:5	0.3	0.3	0.3	0.3	0.3	1.0
CT221-402	4000:5	0.3	0.3	0.3	0.3	0.3	1.0

Model CT221 – LV Plastic-Cased Current Transformers
Window 4.25", 600V, 10kV BIL

DIMENSIONS (ALL DIMENSIONS ARE IN INCHES):

